

Slipstrip™ 2

Low capacity bearing slips made from dense extruded polyethylene sheet for fixed end rotation joints or as a low friction, structural slip membrane.

Advantages

- **Economic** - easily installed on flat surfaces without affecting bearing height.
- **Thin section** - allows use in restricted areas; does not effect concrete cover.
- **Low coefficient of friction** - prevents drag and spalling at extreme edges.
- **Deformable** - accepts minor irregularities in concrete surfaces, prevents locking-up of bearing.
- **Positive separation** - creates slip-plane between dissimilar building materials.
- **Slipstrip™ 2** - for sliding joints having a max load - 0.7 N/mm² with coefficient of friction - 0.15.


The textured bottom layer is then bonded on to a smooth true bearing substrate with Pak Adhesive. Concrete is then cast onto the top layer.

Two layers of Slipstrip 2 can also be used for sliding wall joints, pre-stressed, post-tensioned circular concrete tanks or similar structures provided the safe load bearing capacity is not exceeded.

Applications

Slipstrip™ 2 is an economical low capacity, low friction bearing strip which can be used under in-situ or precast concrete slabs and beams, structural steelwork bearing plates and pipe supports to form a thin sliding joint. It is extruded from specially formulated polyethylene to form a durable laminate which is resistant to most chemicals, solvents and weathering.

Slipstrip 2 is therefore ideal as a permanent bearing strip in all conditions of exposure subject to the loading conditions. The bearing strips are formed by layering two sheets together, smooth to smooth face, with drafting tape or similar to prevent the ingress of fines and concrete grout between the sliding faces.

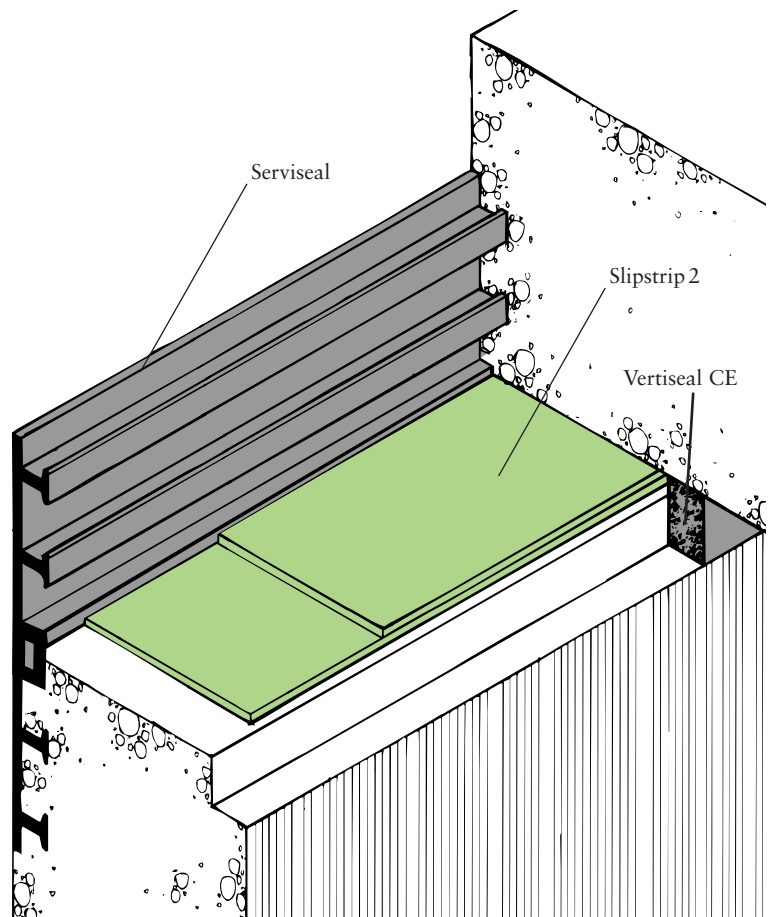

Supply

Slipstrip™ 2

150 mm wide
300 mm wide

1.5 mm thick x 25 m rolls
1.5 mm thick x 25 m rolls

Ancillary Products

Pak Adhesive

5 litre can Full coverage 5 sq m per litre

Complementary Materials

Serviseal® external waterstops

For construction/expansion joints.

Servitite®

Internal waterstops for critical structures.

Bituthene® 4000 DW

Flexible cold-applied sheet membranes for waterproofing reservoir roofs.

Aerofil® 1, Aerofil® 2

Filler Boards, for expansion/movement joints.

Paraseal®, Vertiseal® CE,

Joint Sealants, for expansion/movement joints.

There is no legal requirement for a material Safety Data Sheet for Slipstrip 2. For Paraseal, Vertiseal CE and Pak Adhesive read the product label and Material Safety Data Sheet before use. Users must comply with risk and safety phrases.

Specification Clause

Two layers of Slipstrip™ 2 to be formed into an envelope to the nominated width shown on the detailed drawings and fixed in position with Pak Adhesive at the rate of 5m²/litre on to a smooth true bearing surface, strictly in accordance with the manufacturer's instructions and supplied by Grace Construction Products Limited, Ajax Avenue, Slough, Berkshire SL1 4BH, United Kingdom.
Tel: +44 (0)1753 692929.
Fax: ++44 (0)1753 691623.

Material by Others

Masking tape to form slip layer envelope.

Equipment by Others

Stanley knife for trimming.

Installation

Do not bond into position when temperature is below +5°C.

The bearing substrates should have a steel float finish and be true, smooth, dry, free from dust and debris before bonding the two layers of Slipstrip 2 on to the surface.

Slipstrip 2 of the appropriate width must be formed into an enclosed envelope to prevent the ingress of fines and concrete grout by sealing the edges and all staggered joints with masking tape or similar prior to installation and pouring of concrete. The smooth faces must be married together with the textured faces on the outside.

Joints between layers should be staggered wherever possible and circular fabrications should be formed in short chord lengths with staggered joints.

Pak Adhesive should be applied by brush in a full bodied coat on to the bearing surface and to the textured face of Slipstrip 2. When touch dry the Slipstrip 2 should be offered carefully into position and well rolled to achieve full contact bonding. For full instruction on the use of Pak Adhesive refer to the application guide on the can.

Performance

Slipstrip 2

Maximum load 0.7 N/mm²


Coefficient of static friction 0.15

Operating Temperature

-29°C to 50°C

Health And Safety

Typical Rotation/Sliding Joint

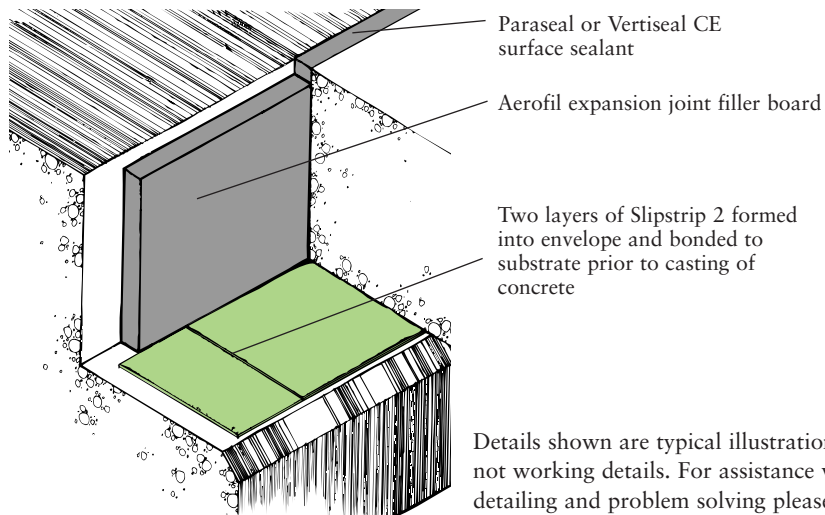

Details shown are typical illustrations and not working details. For assistance with detailing and problem solving please contact our Technical Department on 01753 692929.

 Visit our web site at www.graceconstruction.com

Grace Construction Products Ltd, Ajax Avenue, Slough, Berkshire SL1 4BH United Kingdom Tel +44 (0)1753 692929 Fax +44 (0)1753 691623

Adcor, Aerofil, BETEC, Bituthene, Hydproduct, Insupak, Korkpak, Paraflex, Paraseal, Preprufe, Procor, Servised, Servidek, Servigard, Servijoint, Servimastic, Servipak, Servirufe, Serviseal, Servistrip, Servitite, Vertigard and Vertiseal are registered trademarks of W R Grace & Co.-Conn.
Adprufe, Armourtape, Bitushield, Bitustik, Bitutape, Hydropaste, Pak Adhesive, PVC Edgetie, Serviband, Serviflex, Servitape, Slipstrip, and Solarshield are trademarks of W R Grace & Co.-Conn.

The information given is based on data and knowledge considered to be true and accurate and is offered for the user's consideration, investigation and verification. Since the conditions of use are beyond our control we do not warrant the results to be obtained. Please read all statements, recommendations or suggestions in conjunction with our conditions of sale including those limiting warranties and remedies which apply to all goods supplied by us. No statement, recommendation or suggestion is intended for any use which would violate or infringe statutory obligations or any rights belonging to a third party.

Copyright 2006. Grace Construction Products Limited.

Printed in England - 05.06- Ref. SB014C

GRACE
Construction Products